



BRACKETS

■ MATERIAL:

brackets are made by punch press and roll form operations from hot rolled, mild steel.

■ STANDARD FINISH:

brackets are available in painted green or electro-galvanized finishes.


■ ORDERING INFORMATION:

When ordering, add the length or size and finish to the part number.

BRACKETS

Finish: Painted Green, or Electro-galvanized Order By: No., Size and Finish

CS 626 – Pipe Stop




Clamp Requires bolt and channel nut sold separately.

Note: For use with 2" to 8" Pipe

Weight/100 pcs: 40 lbs.


CS 651 – Reversible Channel Bracket



A Size	Uniform Load*	Wt./100 pcs
6"	1,200	185
12"	600	293
18"	400	401
24"	300	509

*Mounted on 12 Ga. Channel

CS 708 – Single Channel Bracket Support



Use With: CS 200,
CS 210,
CS 500 2T3

Design Moment on Upright Channel:


16 ga. channel 3,200 in.-lbs.,
14 ga. channel 4,400 in.-lbs.
12 ga. channel 5,100 in.-lbs.

Note:

Moment is for fitting only.
Channel may determine overall capacity.

Weight/100 pcs: 235 lbs.

CS 661 T1, CS 661 T2 – Wrap-Around Channel Bracket

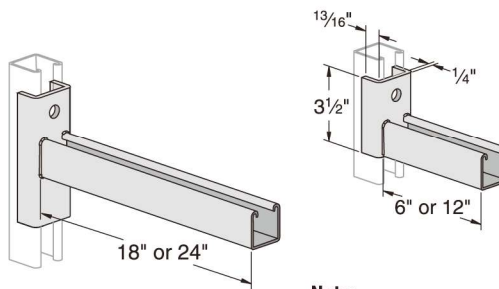

Note:


CS 661 T1 (Slot up) illustrated

CS 661 T2 (Slot down) not shown


Size	Uniform Load*	Wt./100 pcs
6"	1,600	191
12"	800	292
18"	600	436
24"	450	536

*Mounted on 12 Ga. Channel

CS 808 T1, CS 808 T2 – Interlocking Channel Bracket



(CS 808 T1 -Slot Up)




(CS 808 T2 -Slot Down)

A Size	Uniform Load*	Wt./100 pcs
6"	1,200	161
12"	600	261
18"	400	361
24"	300	461

*Mounted on 12 Ga. Channel



CS 809 – Double Channel Bracket



A Size	Uniform Load*	Wt./100 pcs
12"	2,000	502
18"	1,300	692
24"	1,000	882
30"	800	1,072
36"	650	1,262

*Mounted on 12 Ga. Channel

CS 732 – Shelf Bracket




Size	A	B	# of Holes	Uniform Load*	Wt./100 pcs
8"	8 1/2"	4"	2	800	168
10"	10 1/2"		3		202
12"	12 1/2"	6"	4	900	258
14"	14 1/2"		4		292
16"	16 1/2"		4	1,200	381
18"	18 1/2"		4		416
20"	20 1/2"		4	1,000	461

*Mounted on 12 ga. channel

BRACKETS

Finish: Painted Green, or Electro-galvanized Order By: No., Size and Finish

CS 3164 – Double Channel Bracket Support



Use With: CS 200 2T3,
CS 210 2T3

Design Moment on Upright Channel:


16 ga. channel 6,500 in.-lbs.
14 ga. channel 9,100 in.-lbs.
12 ga. channel 13,000 in.-lbs.

Note:

Moment is for fitting only.
Channel may determine overall capacity.

Weight/100 pcs: 273 lbs.

CS 825 R or L – Single Pipe Axle Support



Right Hand Illustrated


Load Rating: 2,000 lbs.

Note:

Specify R (Right) or L (Left) when ordering.

Weight/100 pcs.: 220 lbs.


CS 826 – Double Pipe Axle Support



Load Rating: 4,000 lbs.

Weight/100 pcs.: 310 lbs.

CS 838 R or L – Shelf Bracket





A Size	Stamped Ident. No.	B	Wt./100 pcs
6"	121892	1 15/16"	58
8"	121893	2 7/16"	83
10"	121894	2 15/16"	114
12"	121895	3 7/16"	49
14"	121896	3 15/16"	174
16"	121897	4 7/16"	225
18"	121898	4 15/16"	255
20"	121899	5 7/16"	295
22"	121900	5 15/16"	361
24"	121901	6 7/16"	396
26"	121902	6 15/16"	456
28"	121903	7 7/16"	479
30"	121904	7 15/16"	544

Stock Thickness: .105

Note: Specify
R (Right) or L (Left)
when ordering.
Right Hand Illustrated

Uniform Load Rating:
275 Lbs. when mounted
on 12 ga. channel.

CS 3282 – Cable Tray Strut Bracket




Note:

CS 400 channel welded
to 1/4" stock

A	B	Uniform Load*	Wt./100 pcs
12"	8 3/4"	1,900	388
18"		1,000	506
24"			763
30"	11 1/4"	900	1,012
36"		800	1,083


*Mounted on 12 ga. channel.

CS 2404 thru PS 2408 – Wall Ladder Bracket



Part No.	A	B	Wt./100 pcs
CS 2404	2 3/8"	6"	113
CS 2405	4 3/8"	8"	164
CS 2406	6 3/8"	10"	216
CS 2407	8 3/8"	12"	267
CS 2408	10 3/8"	14"	318

CS 2422 – 37 1/2° Degree Stair Tread Support

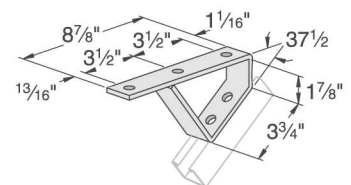


Weight/100 pcs: 213 lbs.

BRACKETS


Finish: Painted Green, or Electro-galvanized **Order By:** No., Size and Finish

CS 2421 – 45° Degree Stair Tread Support



Weight/100 pcs: 220 lbs.


CS 855 – Angular "I" Beam Clamp

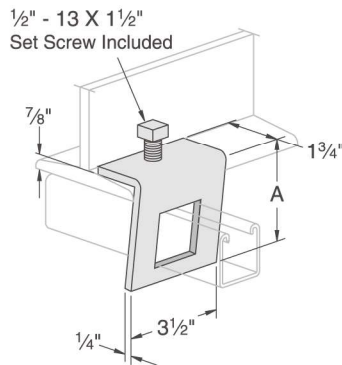

Part No.	Use With	A	Load Rating	Wt./100 pcs.
CS 855-1	CS 200, CS 210	3 1/2"	500	107
CS 855-2	CS 500			98

Use in pairs only

CS 2657 – Double U Beam Clamp



Specify 6" or 12" max. flange width
(Example: CS 2657 T1-6")

T1 Use with:

CS 200, CS 210, CS 300,
CS 400, CS 500, CS 520

T2 Use with:

CS 100, CS 150, CS 200 2T3


T3 Use with:

CS 150 2T3, CS 100 2T3

Part No.	"A" Beam Flange Width
CS 2657 T1-6	4" - 6"
CS 2657 T1-9	6" - 9"
CS 2657 T1-12	9" - 12"
CS 2657 T1-15	12" - 15"
CS 2657 T1-18	15" - 18"
CS 2657 T2-6	4" - 6"
CS 2657 T2-9	6" - 9"
CS 2657 T2-12	9" - 12"
CS 2657 T2-15	12" - 15"
CS 2657 T2-18	15" - 18"
CS 2657 T3-6	4" - 6"
CS 2657 T3-9	6" - 9"
CS 2657 T3-12	9" - 12"
CS 2657 T3-15	12" - 15"
CS 2657 T3-18	15" - 18"

Weight/100 pcs: 280 lbs.

CS 2656 – U Bolt Beam Clamp With Hook



Specify 6" or 12" max. flange width
(Example: CS 2656 T1-6")

T1 Use with:

CS 200, CS 210, CS 300,
CS 400, CS 500, CS 520

T2 Use with:

CS 100, CS 150, CS 200 2T3


T3 Use with:

CS 150 2T3, CS 100 2T3

Part No.	"A" Beam Flange Width
CS 2656 T1-6	4" - 6"
CS 2656 T1-9	6" - 9"
CS 2656 T1-12	9" - 12"
CS 2656 T1-15	12" - 15"
CS 2656 T1-18	15" - 18"
CS 2656 T2-6	4" - 6"
CS 2656 T2-9	6" - 9"
CS 2656 T2-12	9" - 12"
CS 2656 T2-15	12" - 15"
CS 2656 T2-18	15" - 18"
CS 2656 T3-6	4" - 6"
CS 2656 T3-9	6" - 9"
CS 2656 T3-12	9" - 12"
CS 2656 T3-15	12" - 15"
CS 2656 T3-18	15" - 18"

Weight/100 pcs: 143 lbs.

CS 685 – Beam Clamp

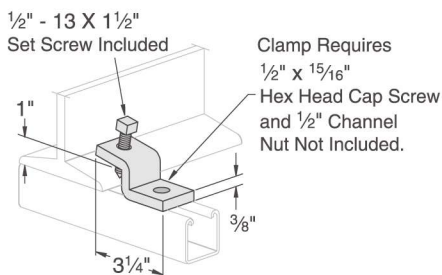


Stock Thickness: 3/8"
Load Rating: 450 lbs.

Use in pairs only

Weight/100 pcs: 63 lbs.

CS 2651 – Beam Clamp



Part No.	Use With	A	Load Rating	Wt./100 pcs.
CS 2651 T1	CS 200, CS 210 CS 300, CS 400 CS 500, CS 520	3 3/8"	1,000	83
CS 2651 T2	CS 100, CS 150 CS 200 2T3	5"		92
CS 2651 T3	CS 150 2T3 CS 100 2T3	8 1/4"		112

Use in pairs only