



PIPE & CONDUIT CLAMPS

MATERIAL:

pipe, conduit and O.D. tubing clamps are made on punch press dies from hot rolled, pickled and oiled steel which conforms to the ASTM A-1008, A-1011 SS, A-575 and A-576 standards. Select sizes of O.D. tubing clamps are available in stainless steel or aluminum.

STANDARD FINISH:

All steel clamps are electro-galvanized. Select sizes of O.D. tubing clamps are available in copper plated finish. PVC coatings are available upon special request.


ORDERING INFORMATION:

When ordering, add the length or size and finish to the part number.

PIPE & CONDUIT CLAMPS

Finish: Electro-galvanized Order By: No. and Finish


CS 1000 – EMT Conduit Clamp



NOTE: For EMT larger than 2" use CS 1100


EMT Size	Stock Thickness	Hanging Load Rating/lbs.	Wt./ 100 pcs
1/2"	.060	400	11
3/4"	.060	400	12
1"	.075	600	15
1 1/4"	.075	600	18
1 1/2"	.105	800	29
2"	.105	800	33

CS 1300 – Universal Clamp for EMT, IMC & GRC



Nom Size	Fits O.D.	Stock Thickness	Hanging Load Rating/lbs.	Wt./ 100 pcs
1/2"	.706-.840	.060	250	10
3/4"	.922-1.050	.060	400	11
1"	1.163-1.315	.060	400	12
1 1/4"	1.510-1.660	.075	400	18
1 1/2"	1.740-1.900	.075	500	20
2"	2.197-2.375	.075	500	22

CS 1100, CS 1116, CS 1117 – Standard Pipe Clamp (GRC, IMC and SCH 40/SCH 80 steel pipe)



Material and finish are specified as:


1100 ALM .. Alum. clamp, EG fasteners
1100 HDG .. HDG Clamp, Stainless Steel fasteners
1116 Alum. clamp and fasteners
1117 Alum. clamp, Stainless Steel fasteners
1100SS Stainless Steel clamp and fasteners

Pipe Size	Stock Thickness	Hanging Load Rating/lbs.	Wt./ 100 pcs
3/8"	.060	400	10
1/2"	.060	400	11
3/4"	.075	600	15
1"	.075	600	17
1 1/4"	.075	600	19
1 1/2"	.105	800	29
2"	.105	800	34
2 1/2"	.105	800	40
3"	.105	800	47
3 1/2"	.125	1,000	62
4"	.125	1,000	67
5"	.125	1,000	80
6"	.135	1,000	102
8"	.135	1,000	130
10"	.135	1,000	143
12"	.135	1,000	174

PIPE & CONDUIT CLAMPS

Finish: Electro-galvanized Order By: No. and Finish

CS 1200 – O.D. Tubing Clamp



O.D. Size	Stock Thickness	Hanging Load Rating/lbs.	Wt./ 100 pcs	Other Finishes Available	
1/4"	.060	400	8		
3/8"	.060	400	8	CPLT	
1/2"	.060	400	9	CPLT	
5/8"	.060	400	10	CPLT	
3/4"	.060	400	11		
7/8"	.060	400	12	CPLT	
1"	.075	600	14		
1 1/8"	.075	600	15	SS	CPLT
1 1/4"	.075	600	16	SS	
1 3/8"	.075	600	17	SS	CPLT
1 1/2"	.075	600	18	SS	
1 5/8"	.075	600	19	SS	CPLT
1 3/4"	.105	800	29	SS	
1 7/8"	.105	800	28	SS	
2"	.105	800	31	SS	
2 1/8"	.105	800	32	SS	CPLT
2 1/4"	.105	800	33	SS	
2 3/8"	.105	800	34	SS	
2 1/2"	.105	800	35	SS	
2 5/8"	.105	800	37	SS	CPLT
2 3/4"	.105	800	38	SS	
2 7/8"	.105	800	40	SS	
3"	.105	800	41	SS	
3 1/8"	.105	800	43	SS	CPLT
3 1/4"	.105	800	45	SS	
3 3/8"	.105	800	46	SS	
3 1/2"	.105	800	47	SS	
3 5/8"	.105	800	56	SS	CPLT
3 3/4"	.105	800	58	SS	
3 7/8"	.125	1,000	60	SS	
4"	.125	1,000	62	SS	
4 1/8"	.125	1,000	62	SS	CPLT
4 1/4"	.125	1,000	64	SS	
4 3/8"	.125	1,000	66	SS	
4 1/2"	.125	1,000	67	SS	

O.D. Size	Stock Thickness	Hanging Load Rating/lbs.	Wt./ 100 pcs
4 5/8"	.125	1,000	70
4 3/4"	.125	1,000	72
4 7/8"	.125	1,000	73
5"	.125	1,000	74
5 1/8"	.125	1,000	76
5 1/4"	.125	1,000	77
5 3/8"	.125	1,000	78
5 1/2"	.125	1,000	79
5 5/8"	.135	1,000	88
5 3/4"	.135	1,000	90
5 7/8"	.135	1,000	92
6"	.135	1,000	94
6 1/8"	.135	1,000	96
6 1/4"	.135	1,000	98
6 3/8"	.135	1,000	99
6 1/2"	.135	1,000	100
6 5/8"	.135	1,000	102
6 3/4"	.135	1,000	104
6 7/8"	.135	1,000	106
7"	.135	1,000	108
7 1/8"	.135	1,000	110
7 1/4"	.135	1,000	112
7 3/8"	.135	1,000	114
7 1/2"	.135	1,000	116
7 5/8"	.135	1,000	117
7 3/4"	.135	1,000	119
7 7/8"	.135	1,000	121
8"	.135	1,000	123
8 1/8"	.135	1,000	125
8 1/4"	.135	1,000	126
8 3/8"	.135	1,000	128
8 1/2"	.135	1,000	129
8 5/8"	.135	1,000	130


Please contact factory for sizes not shown.

NOTE: SS - Stainless Steel
CPLT - Copper Plated

PIPE & CONDUIT CLAMPS


Finish: Electro-galvanized Order By: No. and Finish

CS 3138 – Parallel Run Pipe Clamp




Pipe Size	Load Rating	Wt./ 100 pcs
3/8"	300	27
1/2"	300	29
3/4"	300	30
1"	400	31
1 1/4"	400	38
1 1/2"	500	40
2"	500	47
2 1/2"	500	66
3"	500	78
3 1/2"	500	87
4"	500	90

CS 3126 – One-Piece Pipe Strap

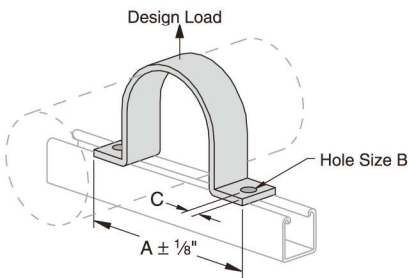


Pipe Size	A	B	C	Design Load	Wt./ 100 pcs
1/2"	2 7/8"	9/32"	7/16"	500	23
3/4"	3 1/8"	9/32"	7/16"	500	26
1"	3 3/8"	9/32"	7/16"	500	31
1 1/4"	3 3/4"	9/32"	7/16"	500	35
1 1/2"	3 7/8"	9/32"	7/16"	500	39
2"	5 3/4"	7/16"	1 1/16"	1,000	94
2 1/2"	6 1/4"	7/16"	1 1/16"	1,000	114
3"	6 7/8"	7/16"	1 1/16"	1,000	133
3 1/2"	7 3/8"	7/16"	1 1/16"	1,000	152
4"	7 7/8"	7/16"	1 1/16"	1,000	176
5"	9"	7/16"	1 1/16"	1,000	198
6"	10"	7/16"	1 1/16"	1,000	225

CS 1450 – One-Hole Clamp for O.D. Tubing

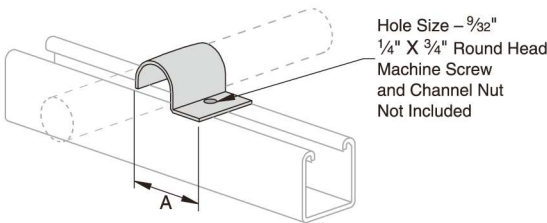

O.D. Size	A	Thickness Gages	Wt./ 100 pcs
1/4"	1 3/16"	16	4
3/8"	1 5/16"	16	5
1/2"	1 7/16"	16	6
5/8"	1 5/8"	14	8
3/4"	1 3/4"	14	9
7/8"	1 7/8"	14	10
1"	2"	14	11

CS 3792 – Power-Wrap™

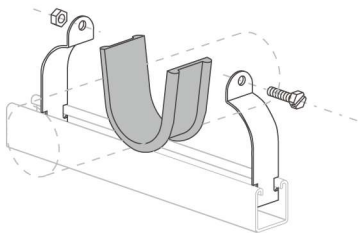


Material: EPDM
Stock Thickness: 1/8"
Stock Length: 25 ft./box
Service Temp: -70° to 350° F

Weight/100 boxes: 253 lbs.

PIPE & CONDUIT CLAMPS


Finish: Electro-galvanized Order By: No. and Finish

CS 67 – Pipe or Conduit Hanger

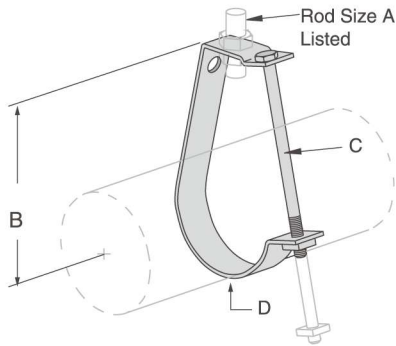


Conduit Size	A Rod Size	B	C	D	Load Rating	Wt./ 100 pcs
1/2"	3/8"	1 3/4"	1/4 x 2 1/4"	1/8 x 3/4"	300	20
3/4"	3/8"	1 7/8"	1/4 x 2 1/4"	1/8 x 3/4"	300	21
1"	3/8"	2 1/4"	1/4 x 2 3/4"	1/8 x 3/4"	300	24
1 1/4"	3/8"	2 3/4"	1/4 x 3 1/4"	1/8 x 3/4"	300	27
1 1/2"	3/8"	3"	1/4 x 3 1/2"	1/8 x 3/4"	300	29
2"	3/8"	3 3/8"	1/4 x 4"	1/8 x 3/4"	300	33
2 1/2"	1/2"	4"	3/8 x 4 1/2"	1/8 x 1 1/4"	500	71
3"	1/2"	4 1/4"	3/8 x 5"	1/8 x 1 1/4"	500	78
3 1/2"	1/2"	4 3/4"	3/8 x 5 1/2"	1/8 x 1 1/4"	500	85
4"	5/8"	5 1/2"	3/8 x 6 1/2"	1/4 x 1 1/4"	600	178
5"	5/8"	6"	3/8 x 7 1/2"	1/4 x 1 1/4"	600	199
6"	3/4"	7"	3/8 x 8 1/2"	1/4 x 1 1/4"	600	231
8"	7/8"	10"	3/8 x 12"	1/4 x 2"	700	449

CS 69 – E-Z Grip Hanger

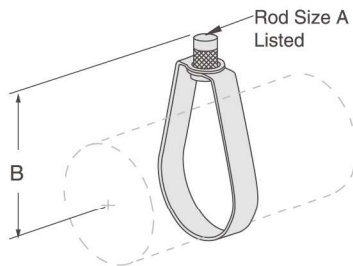

Size	A Rod Size	B	Load Rating Lbs/650	Wt./ 100 pcs
1/2"	3/8"	2 1/4"	300	9
3/4"	3/8"	2 5/16"	300	9
1"	3/8"	2 7/16"	300	10
1 1/4"	3/8"	2 5/8"	300	10
1 1/2"	3/8"	2 3/4"	300	110
2"	3/8"	3 1/4"	300	11
2 1/2"	3/8"	4"	525	25
3"	3/8"	4 3/8"	525	27
4"	3/8"	4 11/16"	600	48
5"	1/2"	5 5/16"	1000	53
6"	1/2"	6 7/16"	1000	100
7"	1/2"	8"	1000	100

CS 51 – Right Angle Pipe or Conduit Clamp




Size	A Diameter	B	Wt./ 100 pcs
3/8"	5/16"	1 5/16"	25
1/2"	5/16"	1 3/16"	41
3/4"	5/16"	1 7/16"	42
1"	5/16"	1 11/16"	47
1 1/4"	5/16"	2"	54
1 1/2"	5/16"	2 5/16"	57
2"	3/8"	2 3/16"	85
2 1/2"	3/8"	3 3/8"	106
3"	3/8"	4 1/8"	110
3 1/2"	3/8"	4 5/8"	128
4"	3/8"	5 1/8"	140

Material: Malleable Iron

PIPE & CONDUIT CLAMPS

Finish: Electro-galvanized Order By: No. and Finish

CS 004T – CS 106N – Cush-a-Clamp Assembly Pipe & Tube Series

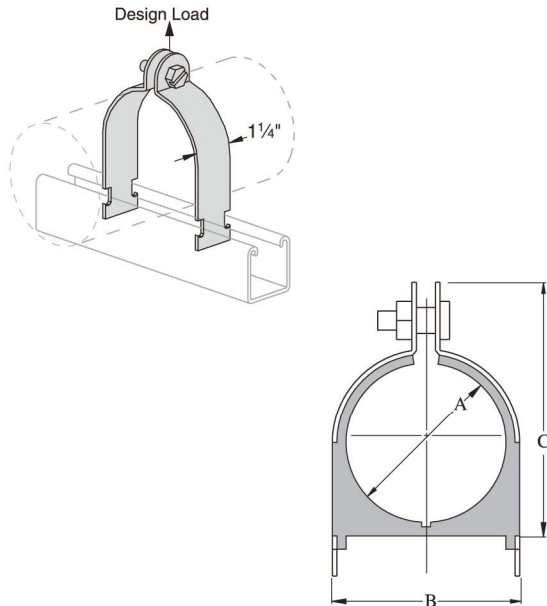

Clamp: Electro-galvanized or stainless steel

Cushion: Thermoplastic elastomer resistant to the effects of most oils, chemicals and industrial cleaning compounds in temperatures from -50°F to 275°F.

Includes: Cushion, Clamp and Hardware

Pipe Series

Part No.	Pipe Size (Nominal)	Dimensions			Wt./100
		A	B	C	
CS 009N	1/4"	0.54	0.98	1.34	13
CS 011N	3/8"	0.67	1.13	1.54	14
CS 014N	1/2"	0.84	1.29	1.82	15
CS 017N	3/4"	1.05	1.50	2.08	17
CS 021N	1"	1.31	1.76	2.34	19
CS 027N	1 1/4"	1.66	2.17	2.73	35
CS 030N	1 1/2"	1.90	2.35	2.86	41
CS 038N	2"	2.37	2.82	3.67	49
CS 046N	2 1/2"	2.87	3.32	4.17	57
CS 056N	3"	3.50	3.95	4.79	55
CS 064N	3 1/2"	4.00	4.45	5.42	88
CS 072N	4"	4.50	4.95	5.92	110
CS 089N	5"	5.56	6.01	6.92	130
CS 106N	6"	6.62	7.07	8.23	140


Tube Series

Part No.	Copper & Steel Tube O. D. Size	Copper Water Pipe (Nominal)	Dimensions			Wt./100
			A	B	C	
CS 004T	1/4"		0.25	0.62	0.98	10
CS 006T	3/8"	1/4"	0.37	0.82	1.13	11
CS 008T	1/2"	3/8"	0.50	0.94	1.34	13
CS 010T	5/8"	1/2"	0.62	1.06	1.54	14
CS 012T	3/4"	5/8"	0.75	1.2	1.68	14
CS 014T	7/8"	3/4"	0.87	1.31	1.82	15
CS 016T	1"		1.00	1.44	1.95	17
CS 018T	1 1/8"	1"	1.12	1.57	2.08	18
CS 020T	1 1/4"		1.25	1.70	2.21	18
CS 022T	1 3/8"	1 1/4"	1.37	1.82	2.34	20
CS 024N	1 1/2"		1.50	1.95	2.47	33
CS 026N	1 5/8"	1 1/2"	1.62	2.07	2.60	35
CS 028N	1 3/4"		1.75	2.20	2.73	37
CS 030N	1 7/8"		1.87	2.32	2.86	39
CS 032N	2"		2.00	2.45	3.04	41
CS 034N	2 1/8"		2.12	2.57	3.23	46
CS 038N	2 3/8"		2.37	2.82	3.67	47
CS 040N	2 1/2"		2.50	2.94	3.79	49
CS 042N	2 5/8"		2.62	3.07	3.92	51
CS 046N	2 7/8"		2.87	3.32	4.17	55
CS 048N	3"		3.00	3.57	4.42	57
CS 050N	3 1/8"		3.12	3.57	4.42	60
CS 056N	3 1/2"		3.50	3.95	4.79	55
CS 058N	3 5/8"		3.62	4.2	5.11	70
CS 064N	4"		4.00	4.45	5.42	88
CS 066N	4 1/8"		4.12	4.57	5.54	94
CS 072N	4 1/2"		4.50	4.95	5.92	110
CS 082N	5 1/8"		5.12	5.57	6.54	125
CS 098N	6 1/8"		6.12	6.57	7.54	130

PIPE & CONDUIT CLAMPS

Finish: Electro-galvanized Order By: No. and Finish

CS UB 1/2 - CS UB 10 - Cush-a-Clamp Assembly U-Bolt Series

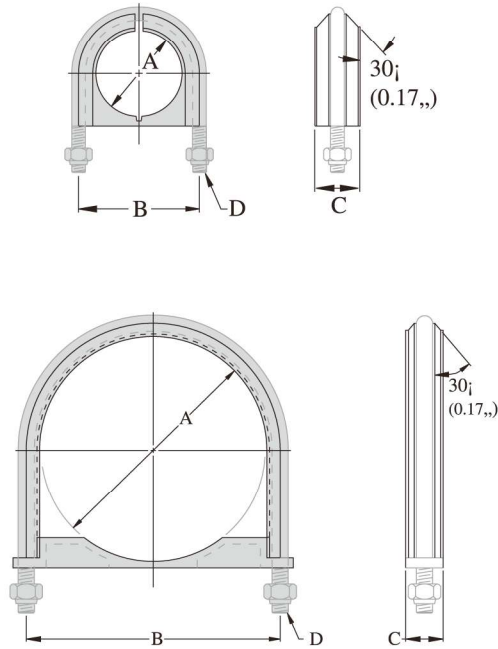

PART NO.	PIPE SIZE	Dimensions				Wt./ 100 Pcs
		A	B	C	D	
CS UB 1/2	1/2"	0.84	1.60	0.68	1/4-20 UNC-2B	9
CS UB 3/4	3/4"	1.05	1.80	0.68	1/4-20 UNC-2B	10
CS UB 1	1"	1.31	2.05	0.68	1/4-20 UNC-2B	12
CS UB 1 1/4	1 1/4"	1.66	2.55	1.24	3/8-16 UNC-2B	32
CS UB 1 1/2	1 1/2"	1.90	2.80	1.24	3/8-16 UNC-2B	36
CS UB 2	2"	2.37	3.35	1.24	3/8-16 UNC-2B	42
CS UB 2 1/2	2 1/2"	2.87	3.90	1.24	1/2-13 UNC-2B	72
CS UB 3	3"	3.50	4.55	1.24	1/2-13 UNC-2B	84
CS UB 3 1/2	3 1/2"	4.00	5.05	1.24	1/2-13 UNC-2B	93
CS UB 4	4"	4.50	5.50	1.24	1/2-13 UNC-2B	102
CS UB 5	5"	5.56	6.56	1.24	1/2-13 UNC-2B	123
CS UB 6	6"	6.62	7.75	1.44	5/8-11 UNC-2B	243
CS UB 8	8"	8.62	9.82	1.44	5/8-11 UNC-2B	293
CS UB 10	10"	10.75	12.16	1.65	3/4-10 UNC-2B	492


Includes U-bolt, cushion, and hardware.

Materials: U-Bolt: Electrogalvanized finish or Type 316 SS

Cushion: Thermoplastic elastomer

Note: Not intended for use with metal framing components due to the length of the thread.

CS 004M - CS 038M - Cush-a-Clamp Assembly Omega Series

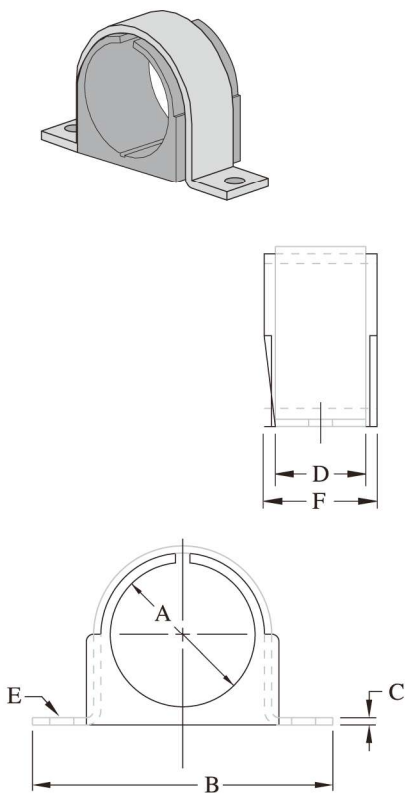

PART NO.	Copper Tubing O.D. SIZE	Water Pipe (Nominal)	Pipe Size (Nominal)	Dimensions						Wt./ 100 Pcs
				A	B	C	D	E	F	
CS 004M	1/4"			0.25	1.81	0.06	0.62	0.20	0.78	3.4
CS 006M	3/8"	1/4		0.37	1.90	0.06	0.62	0.20	0.81	4.0
CS 008M	1/2"	3/8	1/4"	0.50	2.20	0.06	0.75	0.26	0.98	5.5
CS 010M	5/8"	1/2	3/8"	0.62	2.32	0.06	0.75	0.26	0.98	6.0
CS 012M	3/4"	5/8		0.75	2.41	0.06	0.75	0.26	0.98	6.5
CS 014M	7/8"	3/4	1/2"	0.87	2.56	0.06	0.75	0.26	0.98	7.1
CS 016M	1"			1.00	2.68	0.06	0.75	0.26	0.98	7.8
CS 018M20			3/4"	1.05	2.68	0.06	0.75	0.26	0.98	8.1
CS 018M21	1 1/8"	1		1.12	2.82	0.06	0.75	0.26	0.98	8.4
CS 020M	1 1/4"			1.25	3.00	0.08	1.25	0.26	1.56	17
CS 021M			1"	1.31	3.12	0.08	1.25	0.26	1.56	20
CS 022M	1 3/8"	1 1/4		1.37	3.12	0.08	1.25	0.26	1.56	19
CS 024M	1 1/2"			1.50	3.65	0.08	1.25	0.26	1.56	20
CS 026M	1 5/8"	1 1/2		1.62	3.77	0.08	1.25	0.26	1.56	23
CS 027M			1 1/4"	1.66	3.90	0.10	1.25	0.33	1.56	32
CS 028M	1 3/4"			1.75	3.90	0.10	1.25	0.33	1.56	32
CS 030M	1 7/8"		1 1/2"	1.87	4.02	0.10	1.25	0.33	1.56	34
CS 032M	2"			2.00	4.15	0.10	1.25	0.33	1.56	36
CS 034M	2 1/8"			2.12	4.40	0.10	1.25	0.33	1.56	41
CS 038M			2"	2.37	4.71	0.10	1.25	0.33	1.56	44

Includes clamp and cushion.


Materials: Clamp: ZD or Stainless Steel

Cushion: Thermoplastic elastomer

PIPE & CONDUIT CLAMPS

Finish: Electro-galvanized Order By: No. and Finish


CS 3101 thru CS 3115 – One-Piece cable & Conduit Clamp

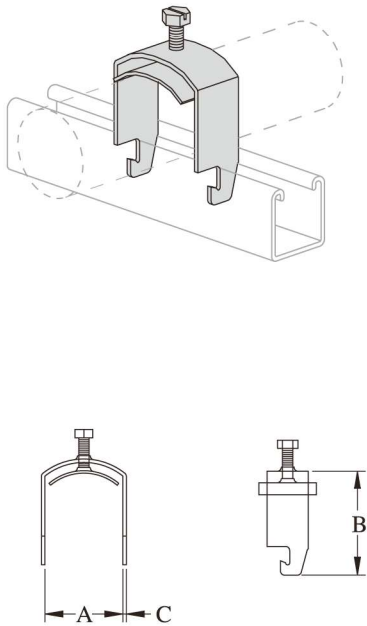

Part No.	Max O.D. Size	A	B	C	Wt/ 100 pcs
CS 3101	3/8"	7/16"	1 5/8"	14	6
CS 3102	1/2"	9/16"	1 3/4"	14	7
CS 3103	3/4"	1 3/16"	2"	14	12
CS 3104	1"	1 1/16"	2 1/4"	14	15
CS 3105	1 1/4"	1 5/16"	2 1/2"	14	19
CS 3106	1 1/2"	1 9/16"	2 3/4"	14	20
CS 3107	1 3/4"	1 13/16"	3"	12	25
CS 3108	2"	2 1/16"	3 1/4"	12	35
CS 3109	2 3/8"	2 7/16"	3 5/8"	12	41
CS 3110	2 3/4"	2 13/16"	4"	12	60
CS 3111	3 1/4"	3 5/16"	4 1/2"	12	74
CS 3112	3 3/4"	3 13/16"	5"	12	91
CS 3113	4"	4 1/16"	5 1/4"	12	100
CS 3114	4 3/8"	4 7/16"	5 5/8"	12	115
CS 3115	4 3/4"	4 13/16"	6"	12	125


Note: Available in Electro-galvanized steel, Type 304 Stainless Steel or Aluminum

CS 270 – Conduit Clamp

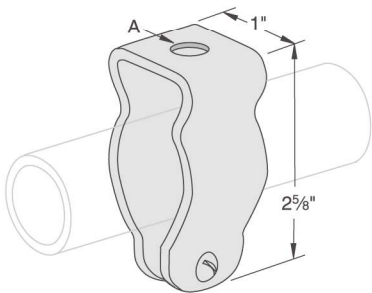

Size	A Diameter	Wt./ 100 pcs
3/8"	1/4"	6
1/2"	1/4"	6
3/4"	1/4"	8
1"	1/4"	9
1 1/4"	1/4"	11
1 1/2"	1/4"	19
2"	1/4"	27

CS 52E – Parallel Pipe and Conduit Clamp



Size	Wt./100 pcs
1/2"	59
3/4"	64
1"	70
1 1/4"	72
1 1/2"	93
2"	128
2 1/2"	135
3"	155
3 1/2"	190
4"	205

Material: Malleable Iron